Product: **KLUDI two position diverter, pre- installation DN 15**

Ref.: **29747**

Product description

two position diverter DN 15
pre-installation set
in-wall installation
flow rate 37,5 l/min at 3 bar
diverter:
2 connectors G 1/2 inch outlets
1 connector G 1/2 inch supply connection
Shut off possible
protection sleeve
reducing socket 3/4 x 1/2 inch


Product picture



Advertisement

two position diverter, manufacturer KLUDI GmbH & Co. KG
KLUDI item no. 29747
type: two position diverter, concealed valve DN 15 / PN 10, pre-installation set, material brass, flow rate 37,5 l/min at 3 bar, connection: once 1/2 inch supply connection, twice 1/2 inch outlet connection, with protection sleeve, with reducing socket 3/4 x 1/2 inch
dimensions: height: 90 mm, width: 90 mm, installation depth: 60 - 120 mm

Dimensional drawing

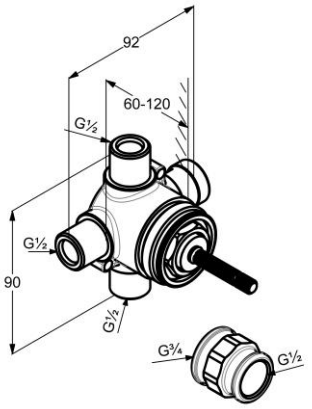

Flow rate diagram

